
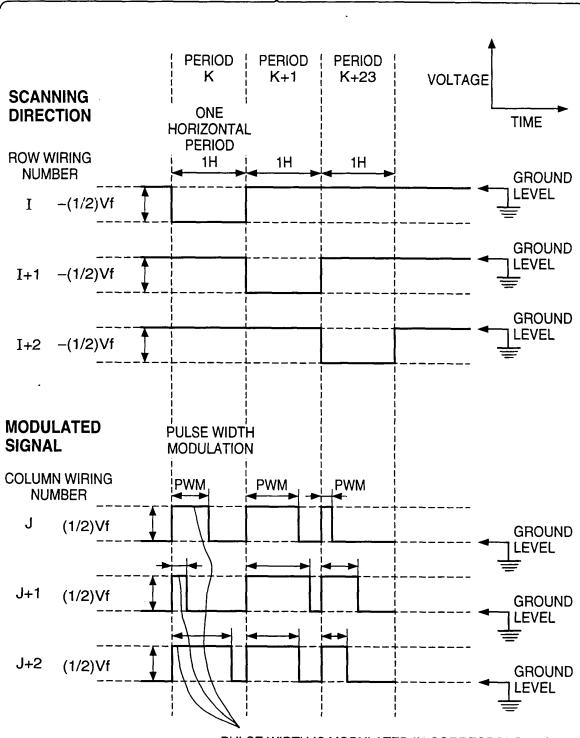
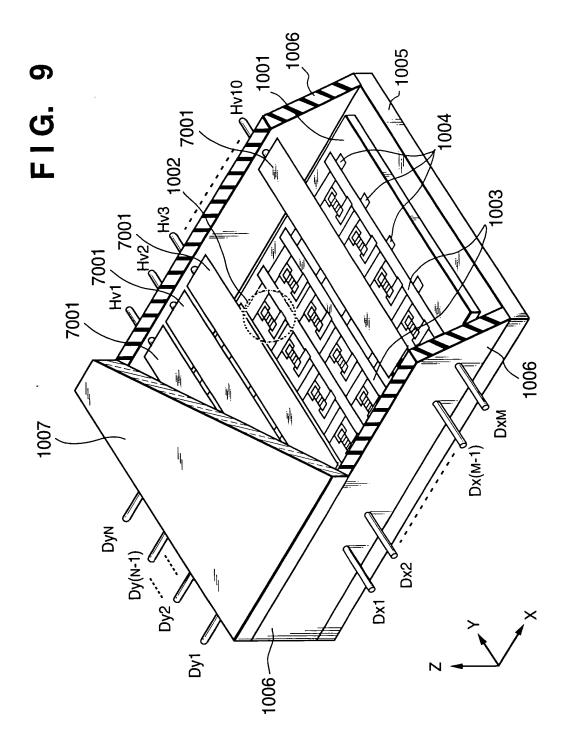



FIG. 8

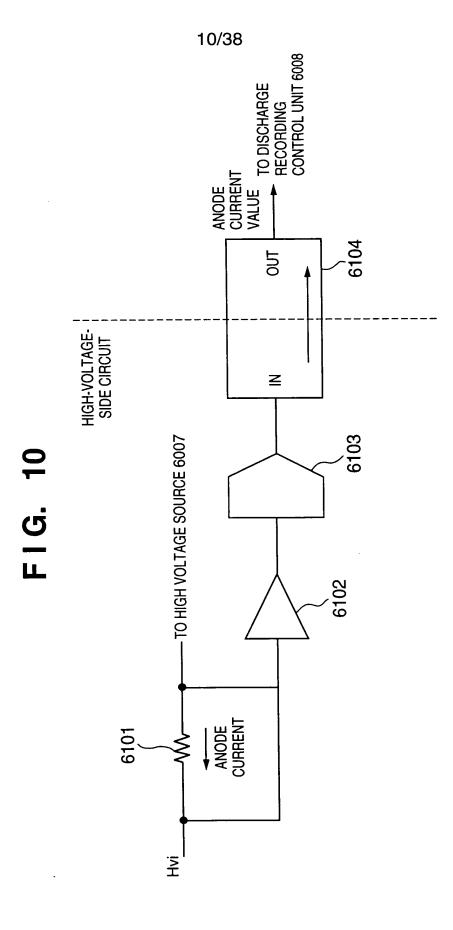

PULSE WIDTH IS MODULATED IN CORRESPONDENCE WITH VIDEO SIGNAL





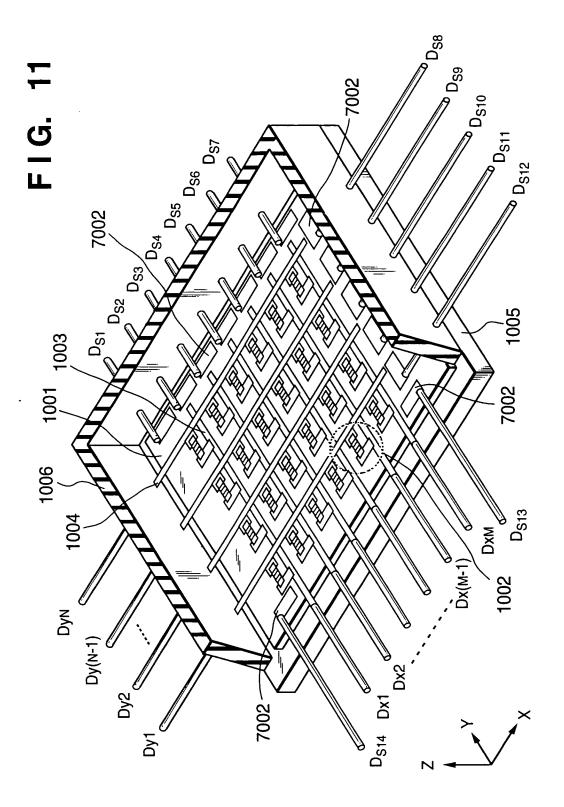




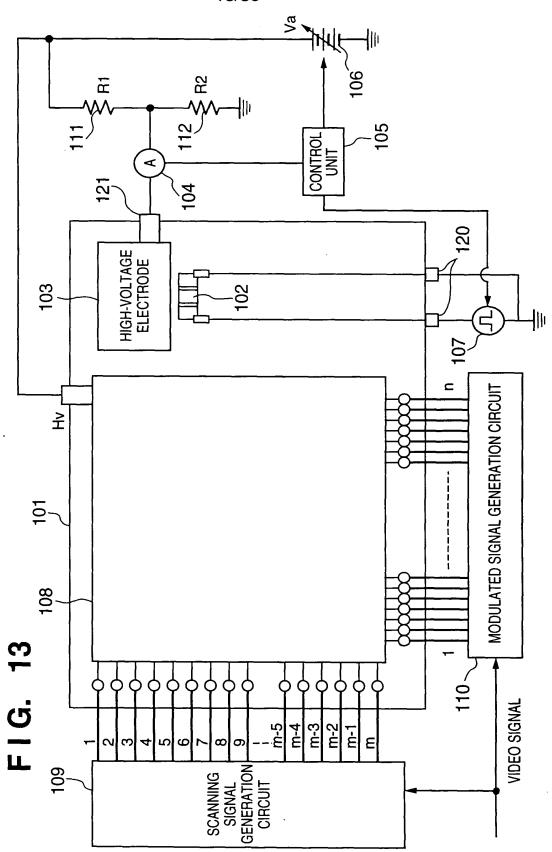



FIG. 14

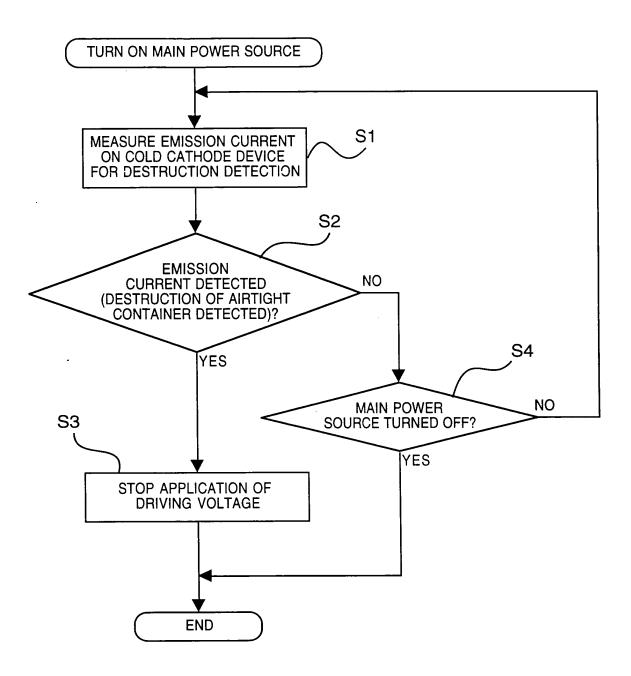

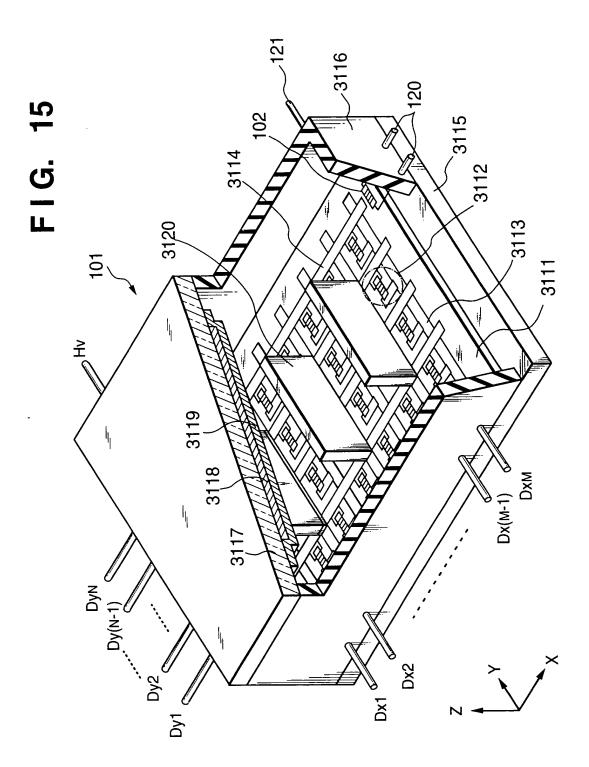

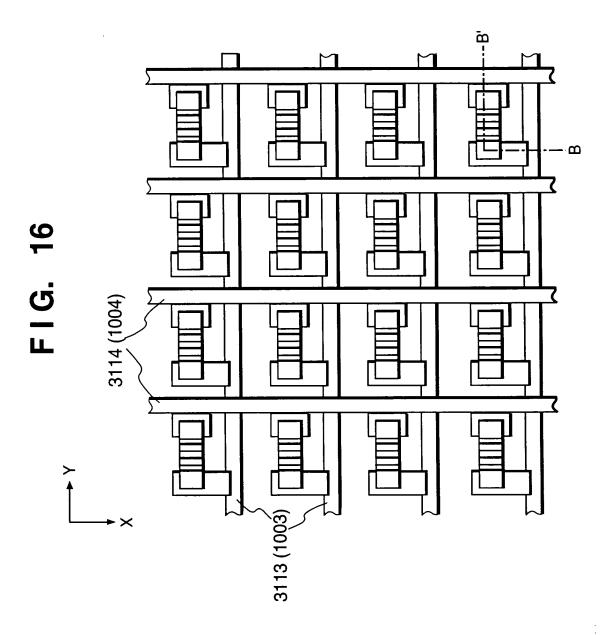


ā

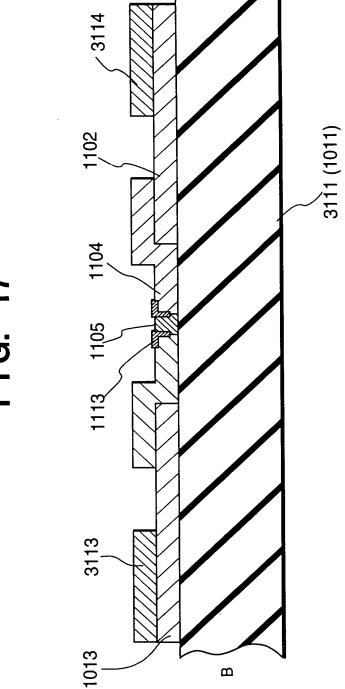

F1G 17

## FIG. 18A

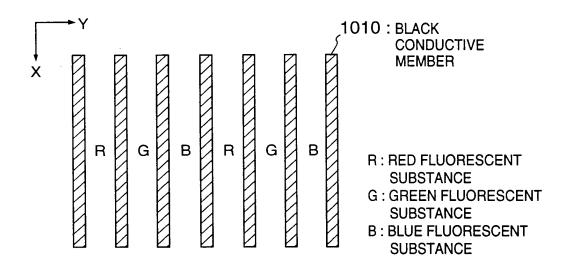

## FIG. 18B

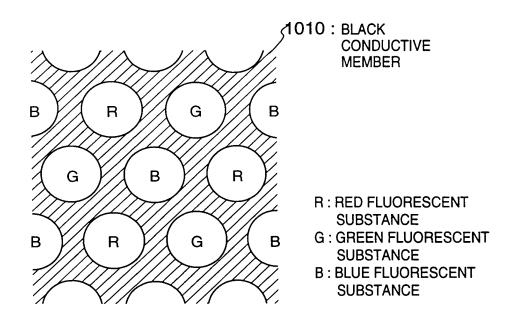


FIG. 19A

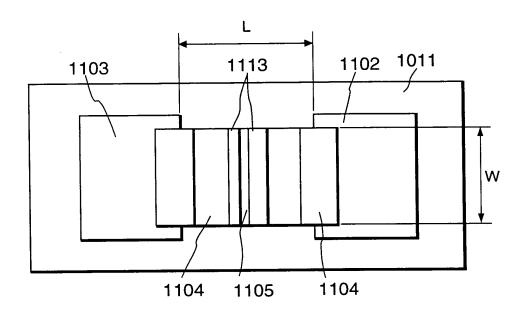


FIG. 19B

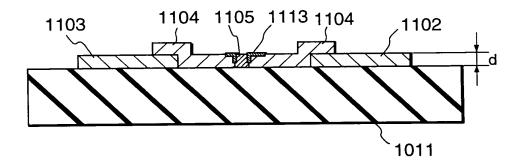


FIG. 20A




FIG. 20B




FIG. 20C

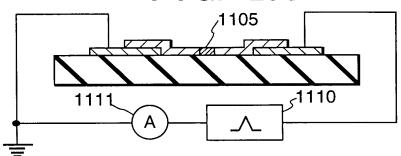


FIG. 20D

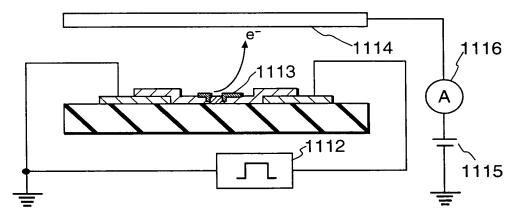



FIG. 20E



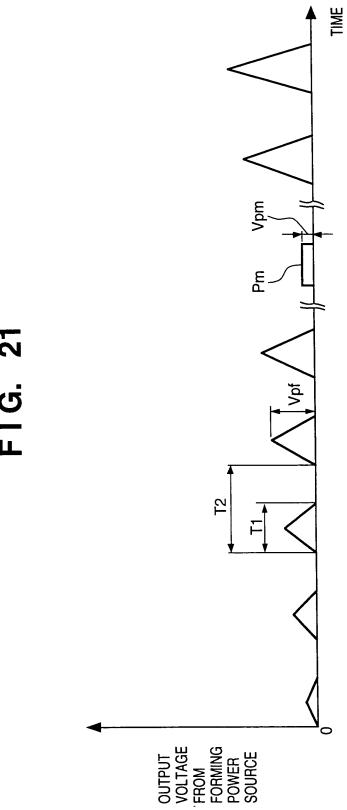
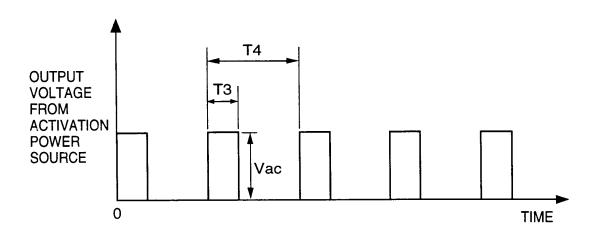
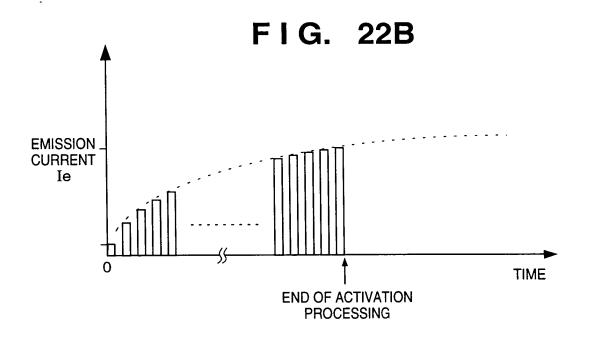
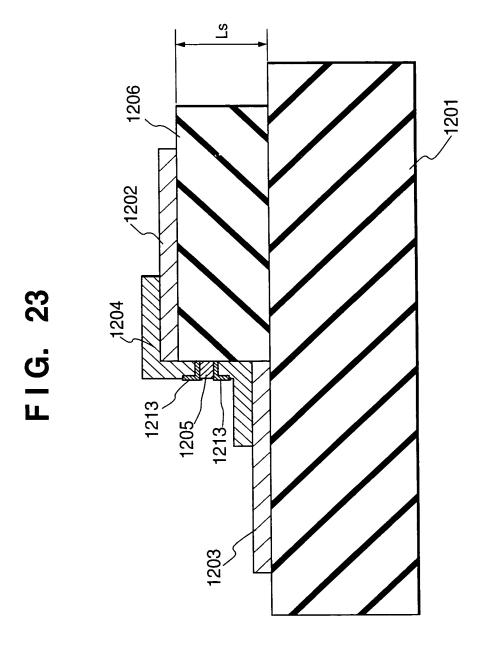


FIG. 22A









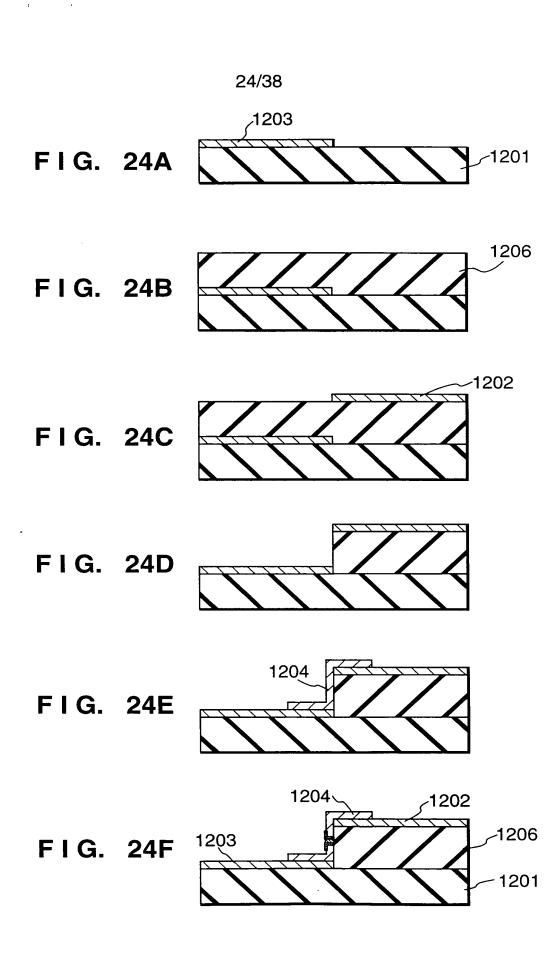


FIG. 25

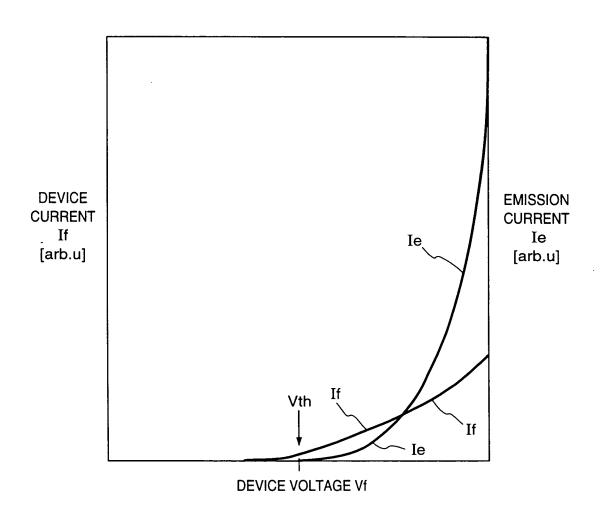

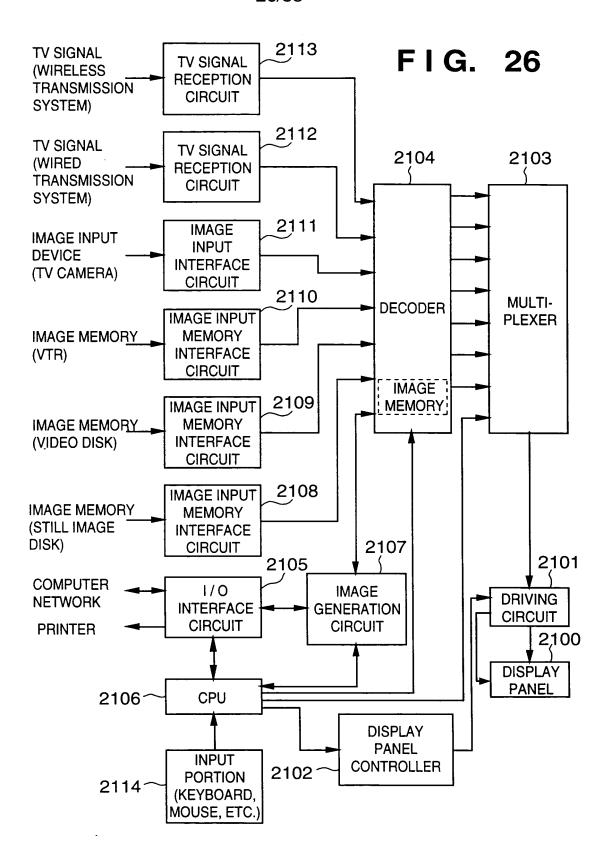

27/38

FIG. 27

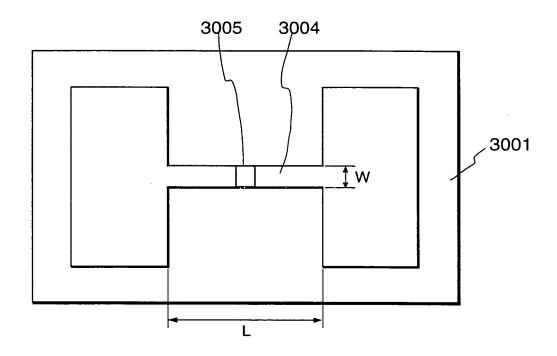


FIG. 28





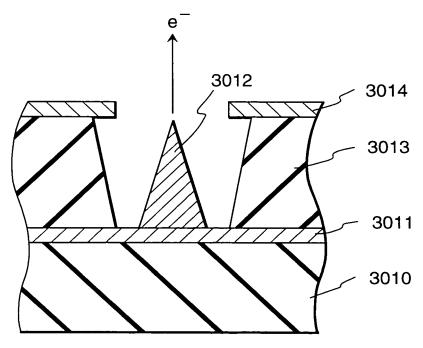


FIG. 29

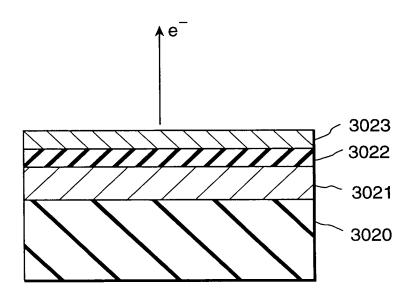


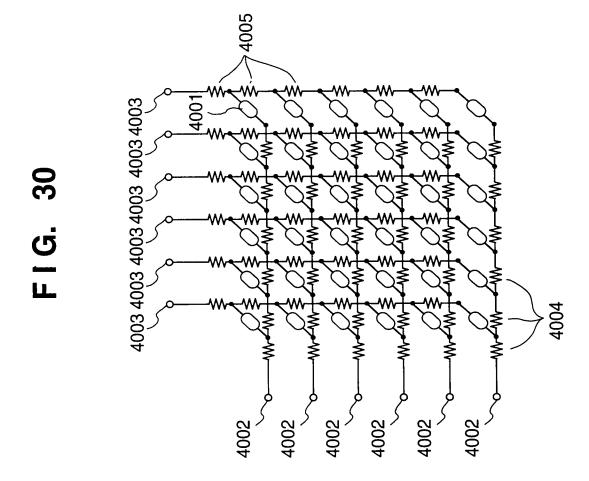


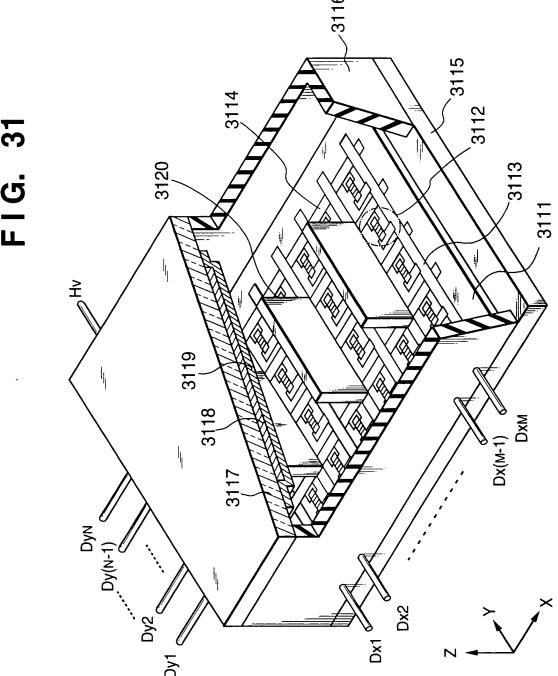

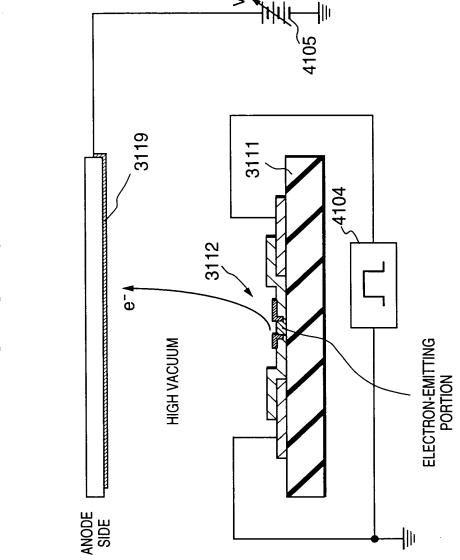

F1G. 32

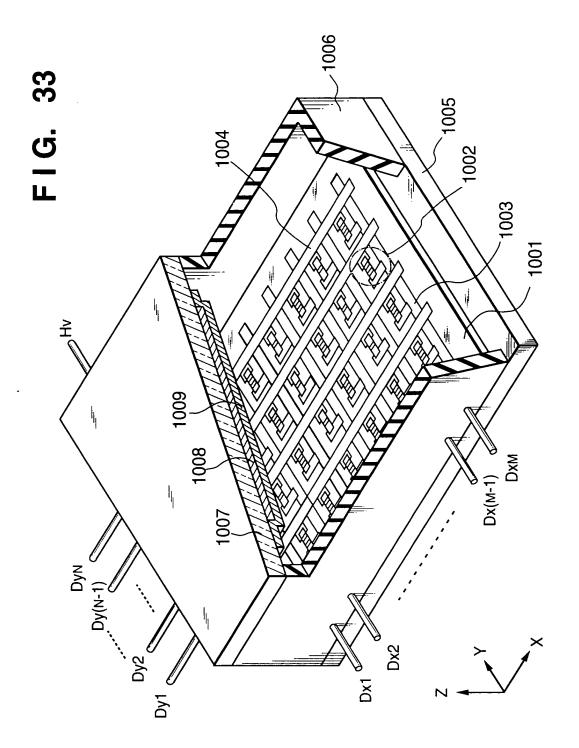

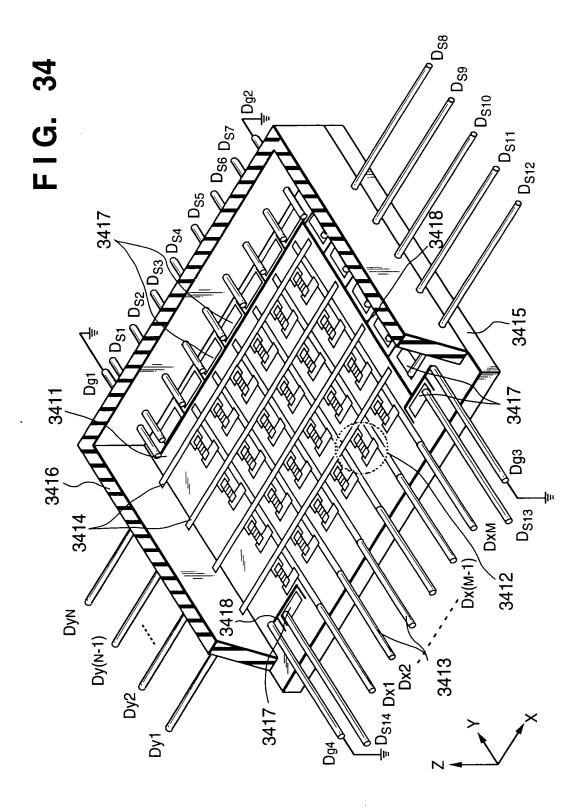

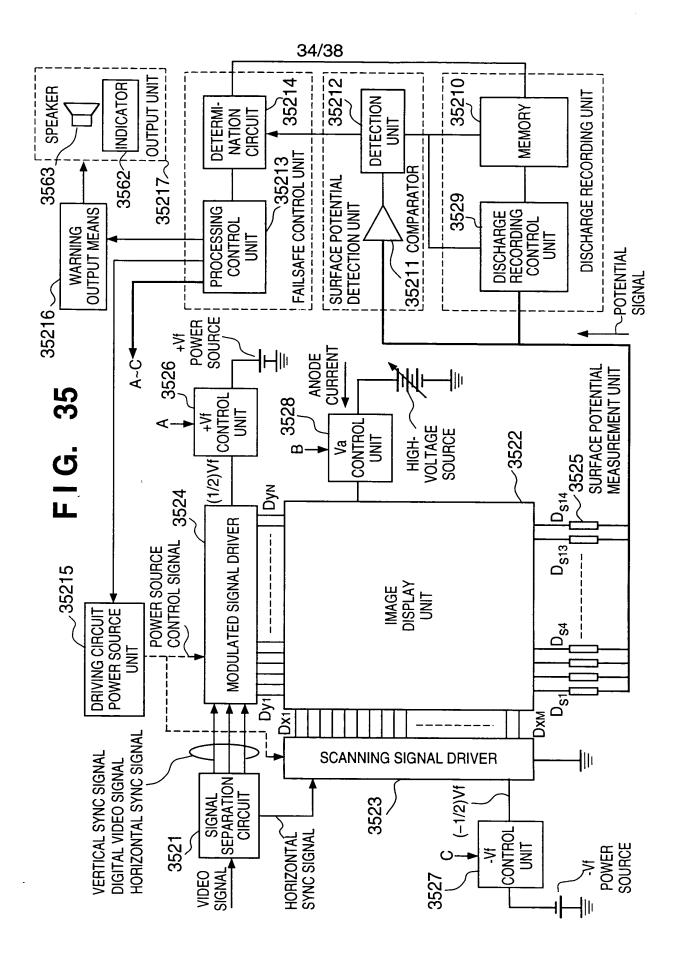


FIG. 36

